

DairyUF 10K

High flux, High Protein Rejection 10,000 Dalton polyethersulfone ultrafiltration membranes designed specifically for whey protein concentration.

All DairyUF products are USDA accepted. Components conform to FDA regulation CFR Title 21 and "3A Sanitary Standards for Crossflow Membrane Modules, Number 45-01, Section C".

Products & Guidelines:

Model	Feed Spacer, inches (cm)	Area, ft ² (m ²)	Dimensions, inches. (cm)			Feed Flow, GPM (m ³ /hr)	Max. Pressure Drop per Element, psi (bar)
			A	B	C		
Dairy10K 3838-30	0.030 (0.076)	80 (7.4)	38.0 (96.5)	3.78 (9.6)	0.83 (2.11)	30 (6.8)	15 (1.0)
Dairy10K 3838-46	0.046 (0.117)	60 (5.6)	38.0 (96.5)	3.78 (9.6)	0.83 (2.11)	30 (6.8)	15 (1.0)
Dairy10K 4336-30	0.030 (0.076)	90 (8.4)	35.5 (90.2)	4.28 (10.9)	0.83 (2.11)	35 (7.9)	15 (1.0)
Dairy10K 4336-46	0.046 (0.117)	70 (6.5)	35.5 (90.2)	4.28 (10.9)	0.83 (2.11)	35 (7.9)	15 (1.0)
Dairy10K 4338-30	0.030 (0.076)	80 (7.4)	38.0 (96.5)	4.28 (10.9)	0.83 (2.11)	35 (7.9)	15 (1.0)
Dairy10K 6338-30	0.030 (0.076)	200 (19)	38.0 (96.5)	6.36 (16.2)	1.138 (2.89)	70 (15.8)	15 (1.0)
Dairy10K 6338-46	0.046 (0.117)	150 (14)	38.0 (96.5)	6.36 (16.2)	1.138 (2.89)	70 (15.8)	15 (1.0)
Dairy10K 6338-65	0.065 (0.165)	120 (11)	38.0 (96.5)	6.36 (16.2)	1.138 (2.89)	70 (15.8)	15 (1.0)
Dairy10K 6338-80	0.080 (0.203)	100 (9.3)	38.0 (96.5)	6.36 (16.2)	1.138 (2.89)	70 (15.8)	15 (1.0)
Dairy10K 8038-30	0.030 (0.076)	360 (33)	38.0 (96.5)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
Dairy10K 8038-46	0.046 (0.117)	280 (26)	38.0 (96.5)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
Dairy10K 8038-65	0.065 (0.165)	215 (20)	38.0 (96.5)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)

Type

Configuration:

Membrane Polymer:

Sanitary (Full-Fit) Spiral Wound

Polypropylene-backed Polyethersulfone

Application Data

Maximum Applied Pressure:

Maximum Chlorine Concentration:

Maximum Operating Temperature:

Operating pH Range:

Cleaning pH Range:

Maximum Pressure Drop for a vessel

150 psig (10 bar)


200 PPM @ pH>10.5

131 °F (55 °C)

2.0 - 10.0

2.0 - 13.0

60 psi (4 bar)

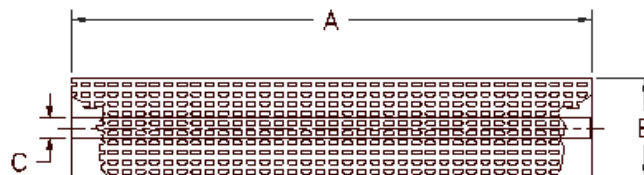

Notice: Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box. Hydranautics believes the information and data contained herein to be accurate and useful. The information and data are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses.

11/01/11